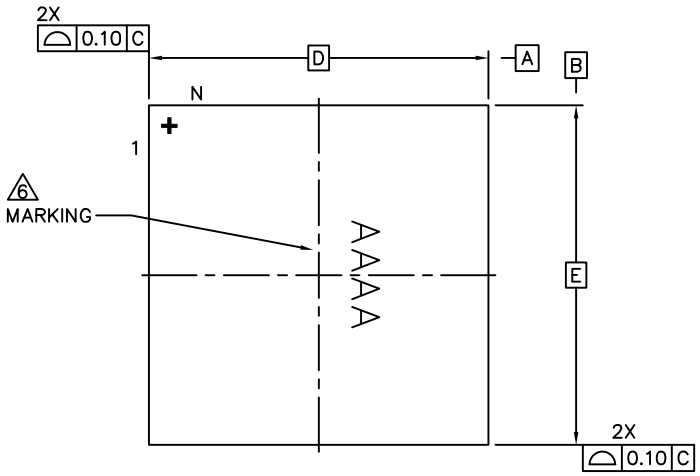

TOP VIEW

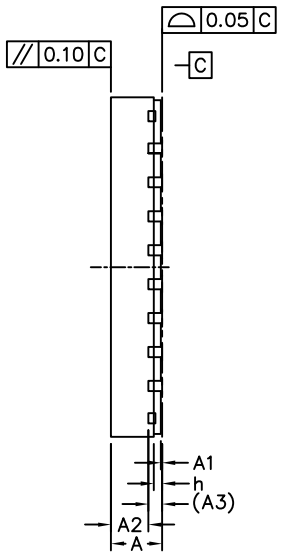

SIDE VIEW

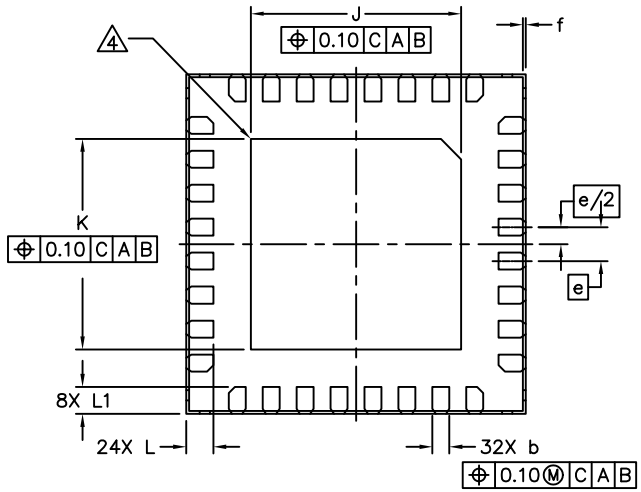

BOTTOM VIEW

	COMMON DIMENSIONS		
DIM	MIN.	NOM.	MAX.
A	0.70	0.75	0.80
A1	0	0.02	0.05
A3		0.203 REF	
b	0.20	0.25	0.30
e		0.50 BSC	
D		5.00 BSC	
E		5.00 BSC	
J	3.00	3.10	3.20
K	3.00	3.10	3.20
L	0.35	0.40	0.45
L1	0.30	0.40	0.45
h	0.10 MINIMUM		
f	0.01	-	0.09
N	32		

NOTES:

1. ALL DIMENSION AND TOLERANCE CONFORM TO ASME Y14.5M–1994.
2. ALL DIMENSION ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
3. N IS THE TOTAL NUMBER OF TERMINALS.
4. BILATERAL COPLANARITY ZONE APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
5. ALL DIMENSION APPLY TO PbFREE (+) PKG. CODES ONLY.
6. MARKING SHOWN IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
7. CONTROLLING DIMENSION: mm.
8. PKG. CODE: T3255Y+8 / T3255Y+8C / T3255MKY+8 / T3255MKY+8C

–DRAWING NOT TO SCALE–

ANALOG DEVICES

TITLE:
PACKAGE OUTLINE, 32L, TQFN,
5X5X0.75mm SIDE-WETTABLE

APPROVAL	DOCUMENT CONTROL NO.	REV.	
KAI LIU	21-100156	F	1/1